
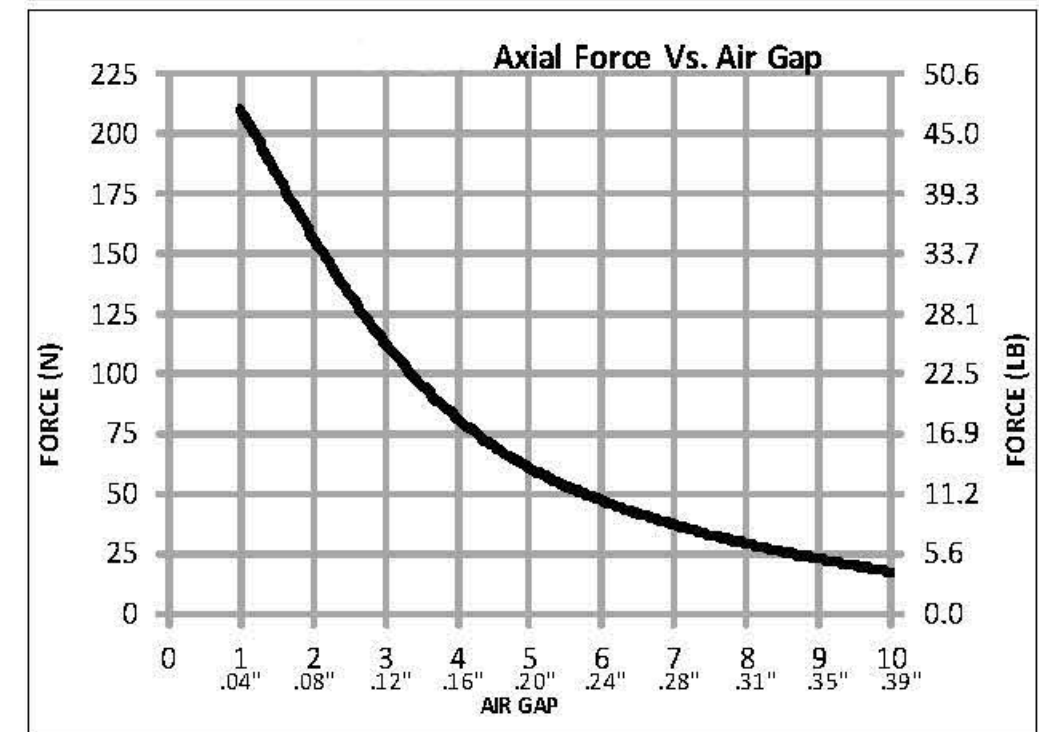
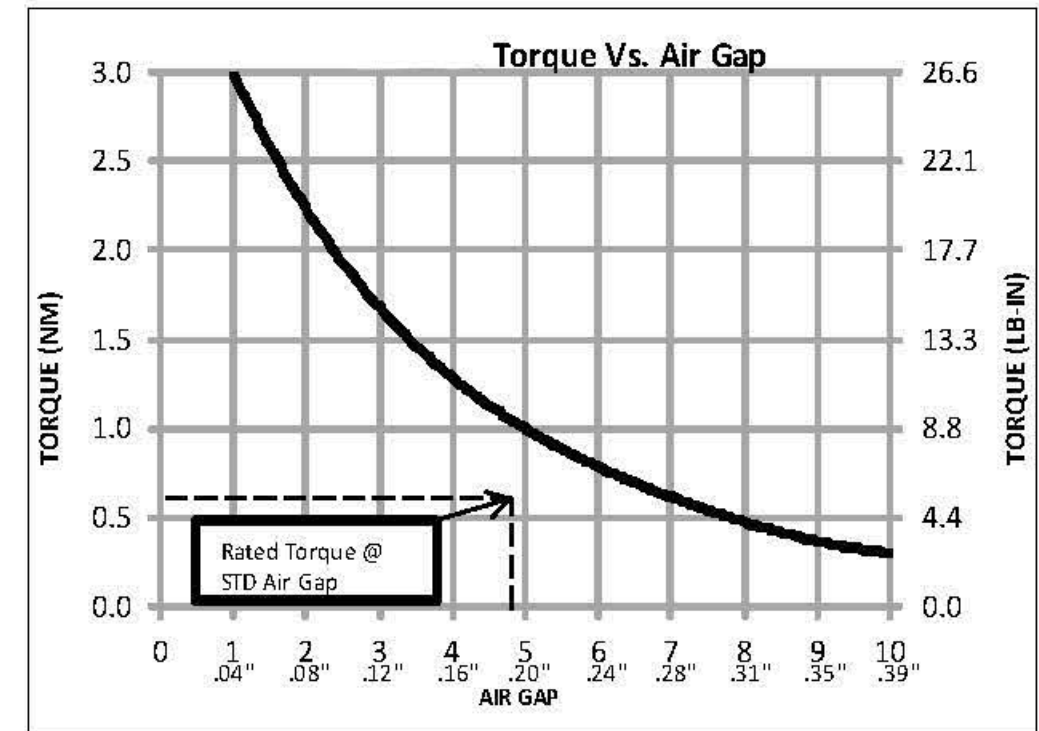


MODEL	RATED TORQUE @ STD. AIR GAP	BREAKAWAY TORQUE	MAX RPM
MDC 0.6	.68 Nm	6 Lb-in	23000

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE

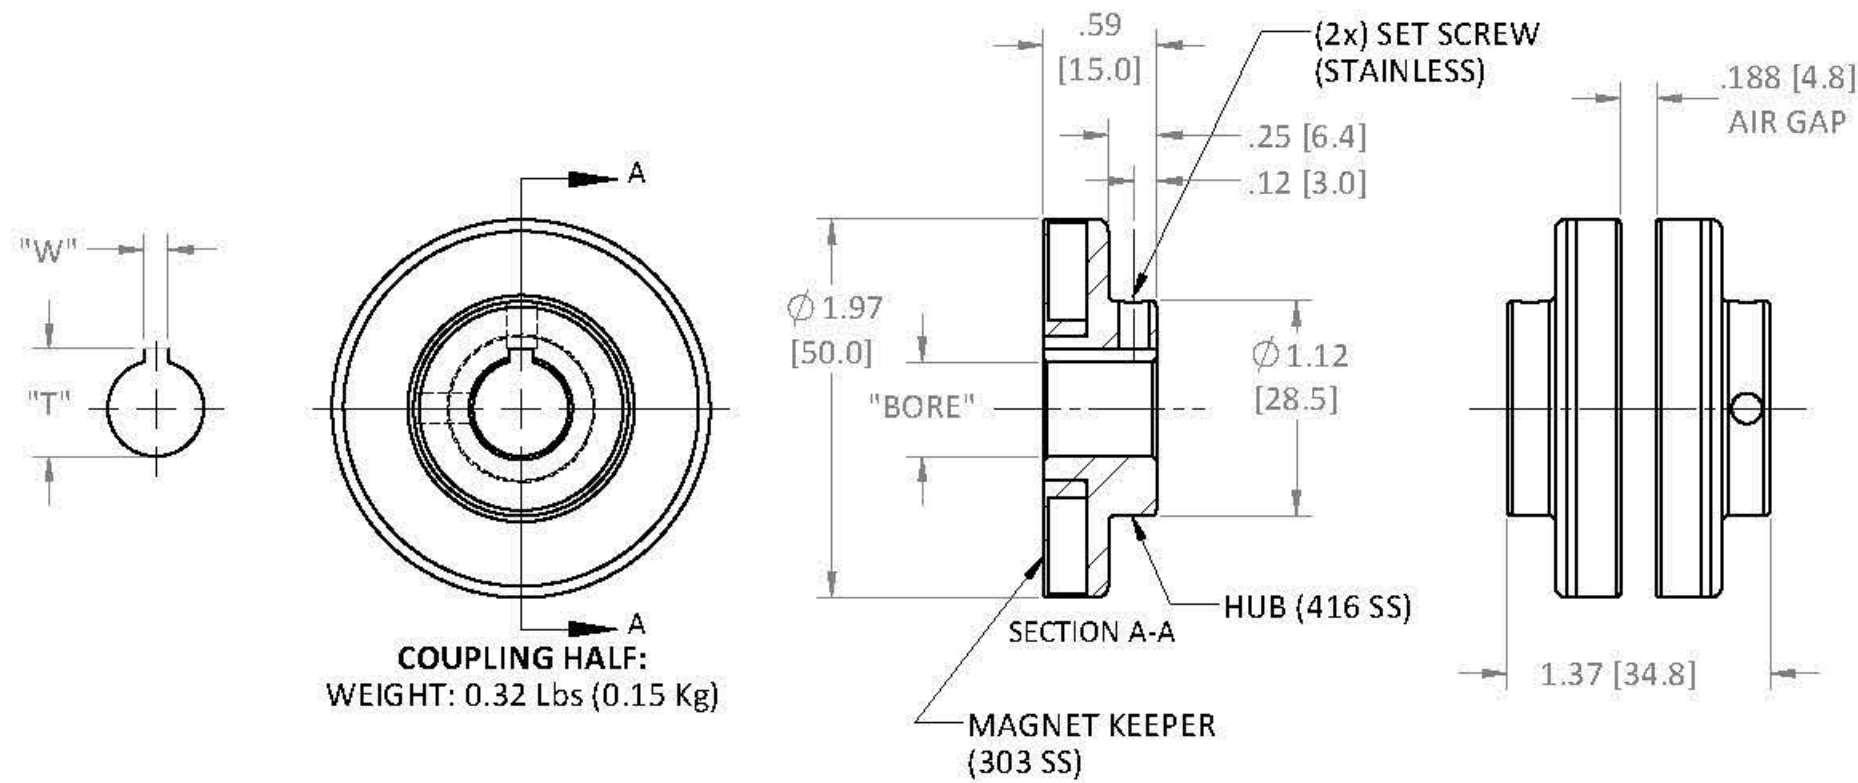

MODEL	BORE		W		T		SET SCREW (2x)
	mm ^{H8}	in ^{+.001}	mm ^{+.05}	in ^{+.002}	mm ^{+.25}	in ^{+.010}	
MDC 0.6							CUP POINT
	SOLID		-		-		-
	6.00	.236	-	-	-	-	M5-0.8 x 8mm
	6.35	.250	-	-	-	-	#10-32 x 5/16
	7.94	.3125	-	-	-	-	#10-32 x 5/16
	8.00	.315	-	-	-	-	M5-0.8 x 8mm
	9.53	.375	-	-	-	-	#10-32 x 5/16
	10.00	.394	-	-	-	-	M5-0.8 x 8mm
	11.00	.433	4.00	.158	12.80	.504	M5-0.8 x 8mm
	12.00	.472	4.00	.158	13.79	.543	M5-0.8 x 8mm
	12.70	.500	3.18	.125	14.22	.560	#10-32 x 5/16

OTHER SIZES AVAILABLE; SPECIFY BOTH BORE AND KEYWAY

USED ON	SCALE 2:1	MATERIAL SEE PRT DWG
UNLESS OTHERWISE SPECIFIED:		FINISH SEE PRT DWG
ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: JX ± .01 - JXXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-STD. 8 REMOVE ALL BURRS & SHARP EDGES		DRAWN AMD 10/17/14 CHECKED DESCRIPTION DWG. NO. REV.
SIZE: B		