

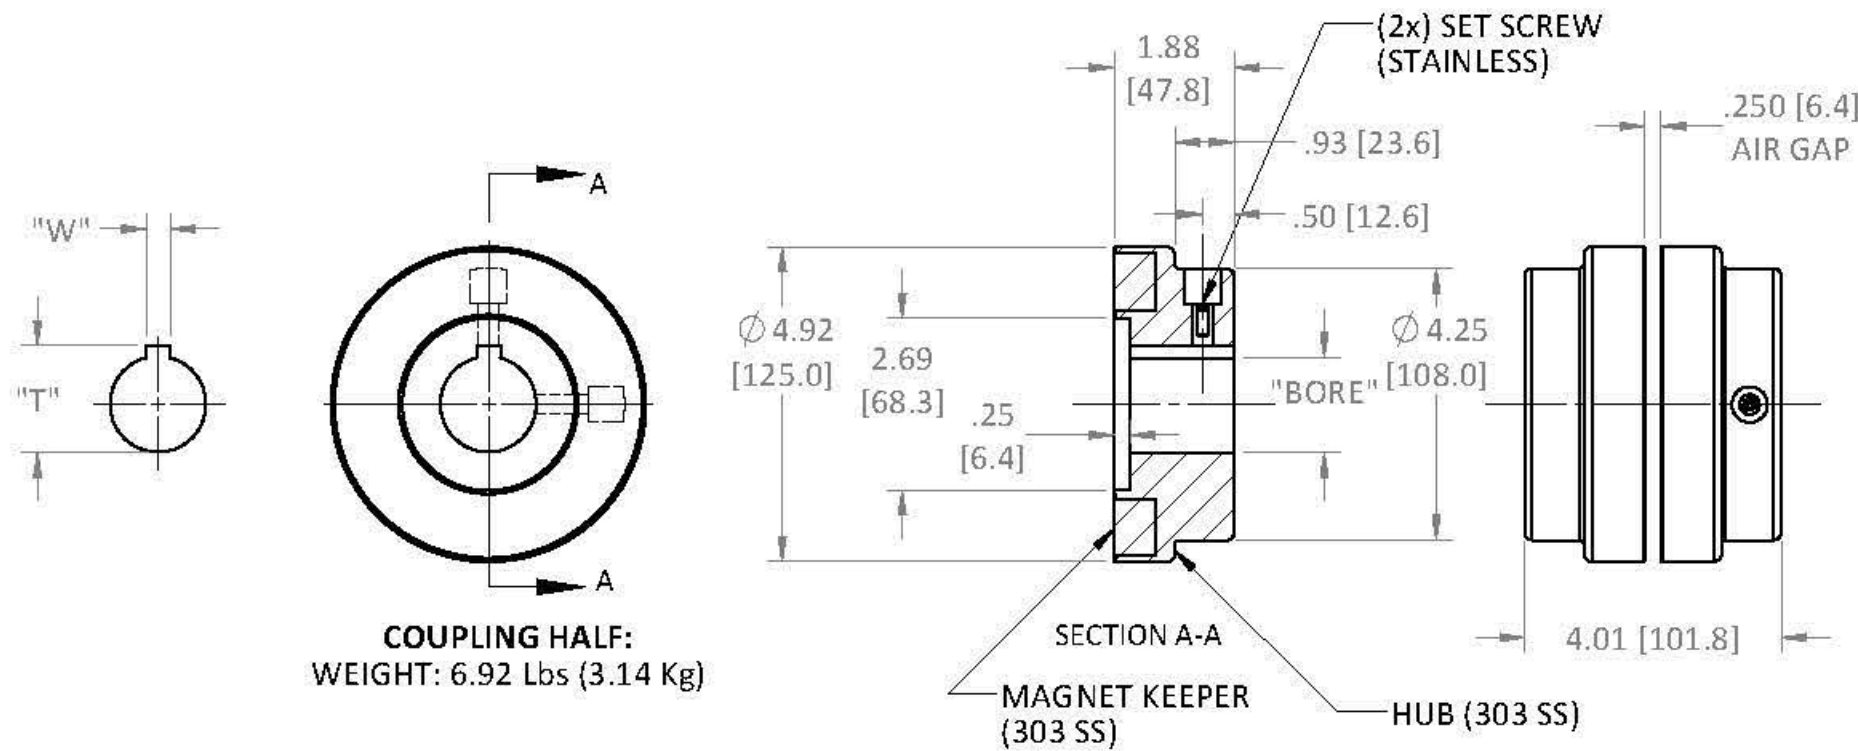


MODEL	RATED TORQUE @ STD. AIR GAP		BREAKAWAY TORQUE		MAX RPM
MDC 30	25.4 Nm	225 Lb-in	27.7 Nm	245 Lb-in	9,200

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE

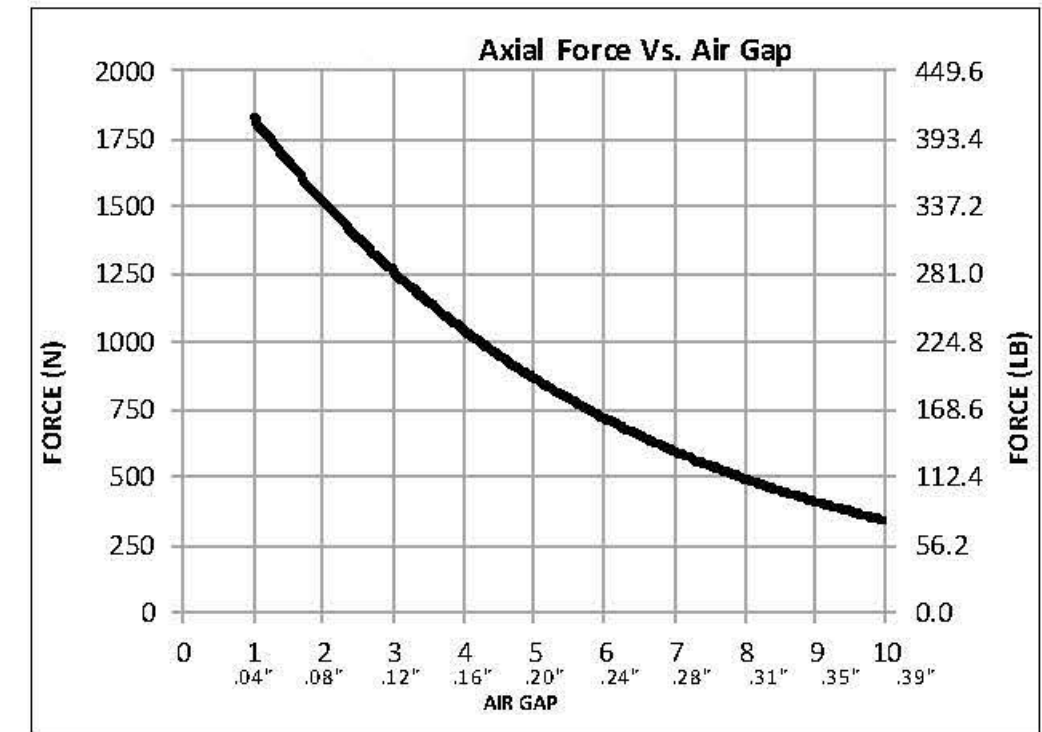

COUPLING HALF:
WEIGHT: 6.92 Lbs (3.14 Kg)

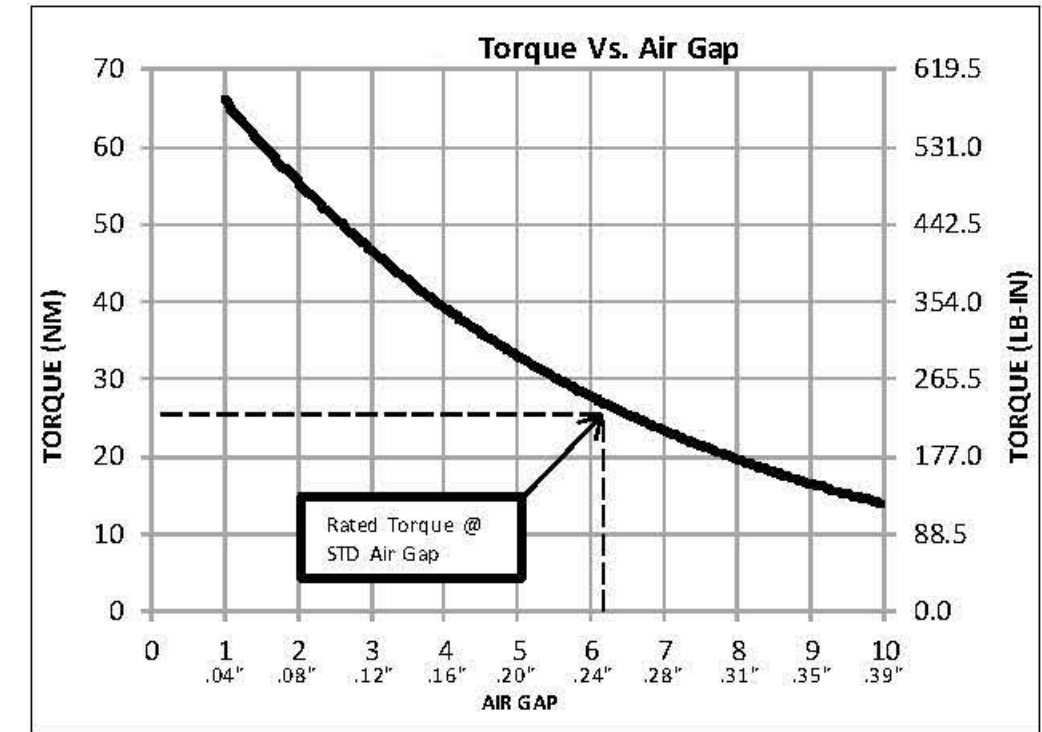

MODEL	BORE		W		T		SET SCREW (2x)
	mm ^{H8}	in ⁺⁰⁰¹	mm ⁺⁰⁵	in ⁺⁰⁰²	mm ⁺²⁵	in ⁺⁰¹⁰	CUP POINT
MDC 30	22.23	.875	-	-	-	-	-
	SOLID		-		-		-
	25.40	1.000	6.35	.250	28.30	1.114	1/4-20 X 1
	28.56	1.125	6.35	.250	31.52	1.241	1/4-20 X 1
	31.75	1.250	6.35	.250	34.72	1.367	1/4-20 X 3/4
	34.93	1.375	7.94	.3125	38.56	1.518	5/16-18 X 3/4
	38.10	1.500	9.53	.375	42.39	1.669	3/8-16 X 5/8
	41.28	1.625	9.53	.375	45.62	1.796	3/8-16 X 5/8
	44.45	1.750	9.53	.375	48.82	1.922	3/8-16 X 5/8
	47.63	1.875	12.70	.500	52.24	2.096	1/2-13 x 1/2
	50.80	2.000	12.70	.500	56.46	2.223	1/2-13 x 1/2
	53.98	2.125	12.70	.500	56.69	2.350	1/2-13 x 1/2

OTHER SIZES AVAILABLE; SPECIFY BOTH BORE AND KEYWAY

*

FROM STOCK

USED ON	SCALE 1:2	MATERIAL SEE PRT DWG	DESCRIPTION Cut Sheet
UNLESS OTHERWISE SPECIFIED:		FINISH SEE PRT DWG	
<small>ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: XX ± .01 - XXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-STD. 8 REMOVE ALL BURRS & SHARP EDGES</small>			DRAWN AMD 11/11/14
			CHECKED
			DWG. NO.
			REV.
SIZE: B			