
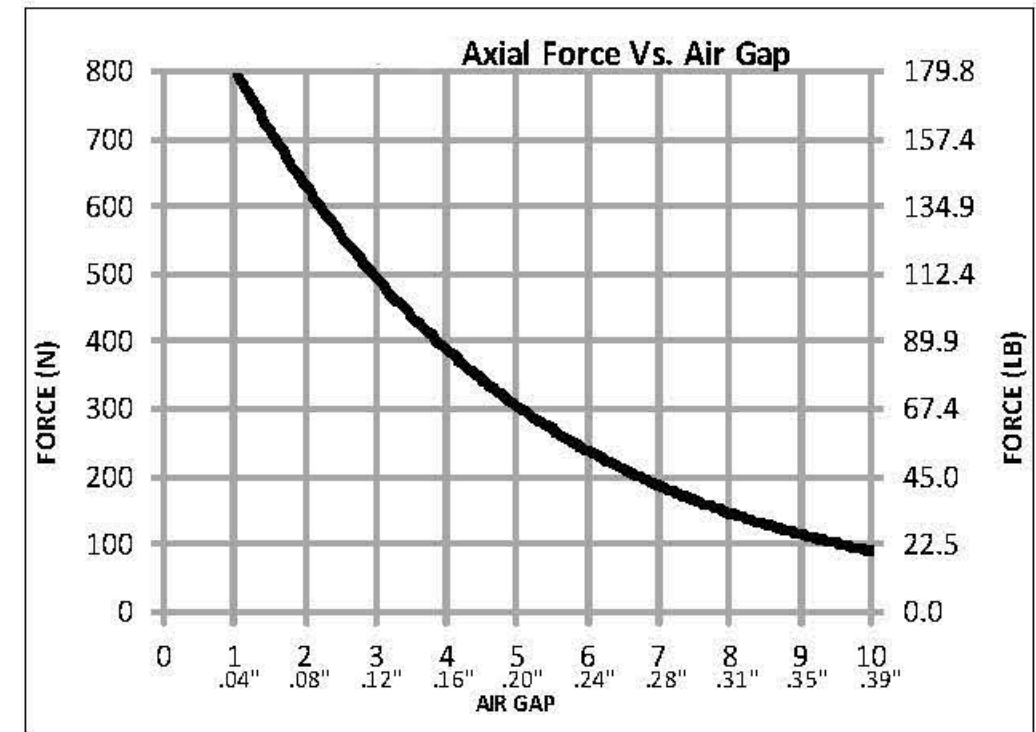
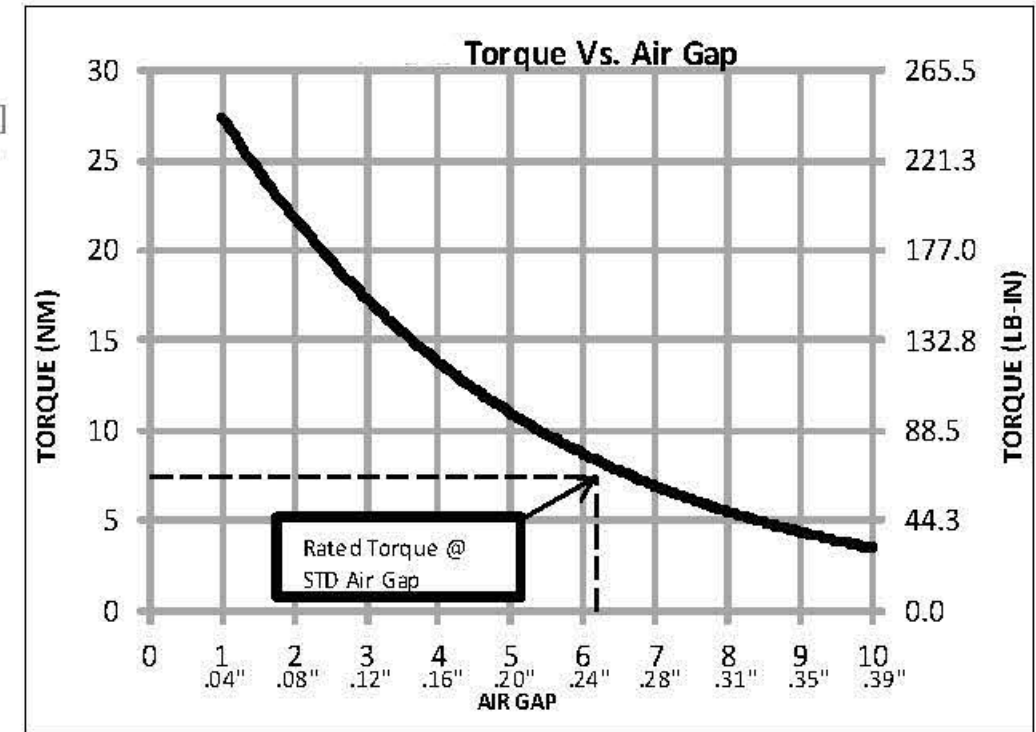
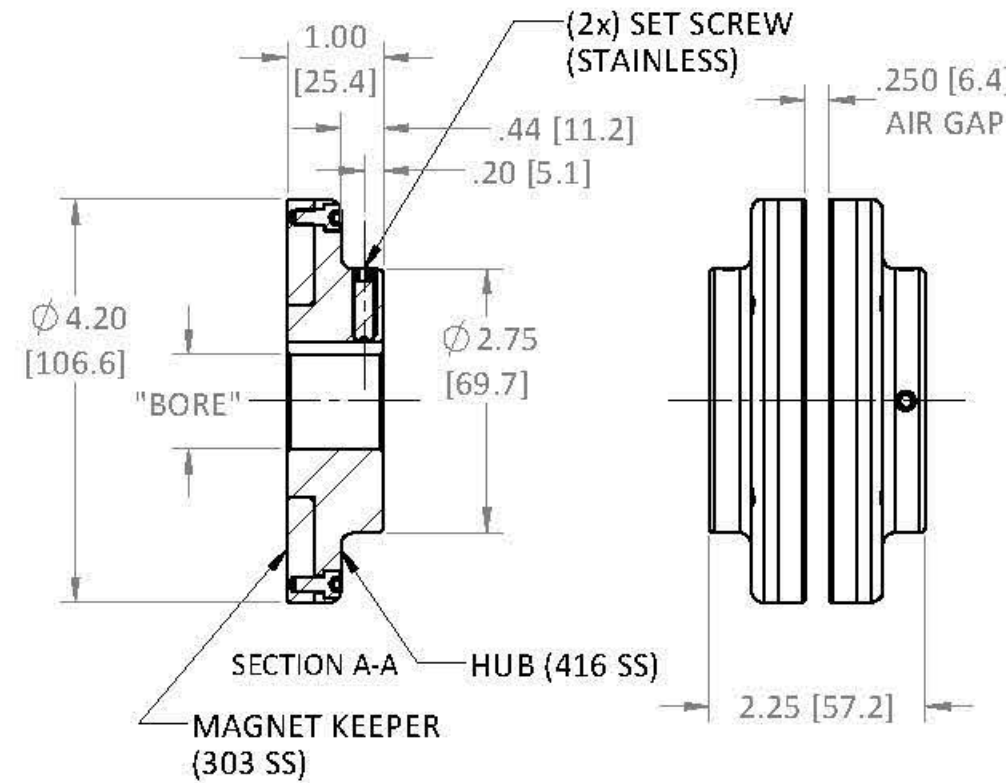


MODEL	RATED TORQUE @ STD. AIR GAP		BREAKAWAY TORQUE		MAX RPM
MDC 8	7.5 Nm	66 Lb-in	8.5 Nm	75 Lb-in	10,500

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE

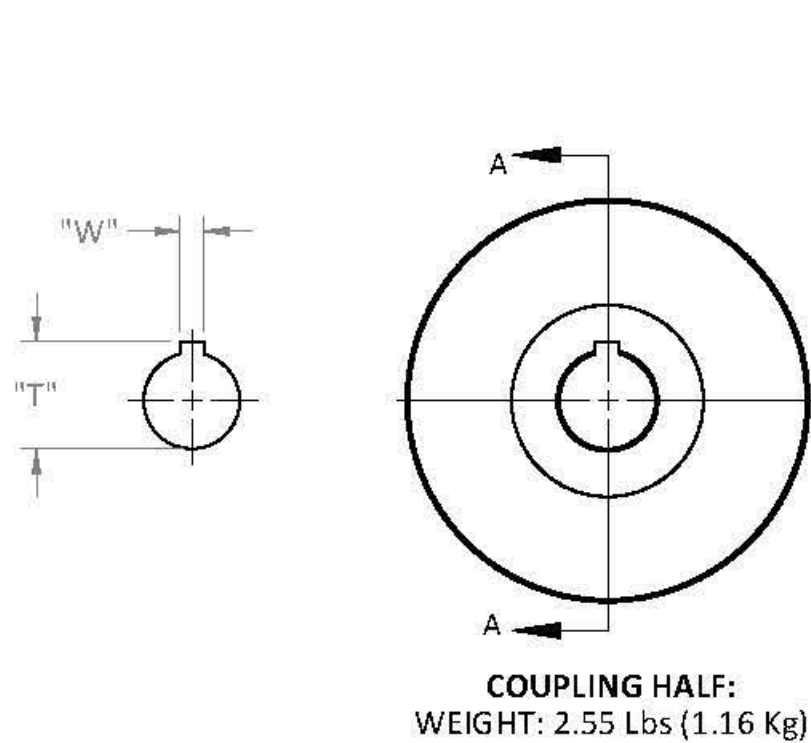

MODEL	BORE		W		T		SET SCREW (2x)
	mm <sup>H8</sup>	in <sup>+.001</sup>	mm <sup>+.05</sup>	in <sup>+.002</sup>	mm <sup>+.25</sup>	in <sup>+.010</sup>	
MDC 8	12.70	.500	3.18	.1250	14.22	.560	#10-32 x 3/4
	14.00	.551	5.00	.1969	16.30	.642	M5-0.8 x 20 mm
	15.88	.625	4.76	.1875	18.00	.709	#10-32 x 3/4
	19.00	.748	6.00	.2362	21.80	.858	M5-0.8 x 20 mm
	19.05	.750	4.76	.1875	21.26	.837	#10-32 x 3/4
	22.23	.875	4.76	.1875	24.49	.964	#10-32 x 3/4
	24.00	.945	8.00	.3150	27.30	1.075	M8 -1.25 x 20 mm
	25.40	1.000	6.35	.2500	28.30	1.114	1/4-20 x 5/8
	28.00	1.102	8.00	.3150	31.30	1.232	M8-1.25 x 20 mm
	28.56	1.125	6.35	.2500	31.52	1.241	1/4-20 x 5/8
	31.75	1.250	6.35	.2500	34.72	1.367	1/4-20 x 5/8
	34.93	1.375	7.94	.3125	38.56	1.518	5/16-18 x 1/2

OTHER SIZES AVAILABLE; SPECIFY BOTH BORE AND KEYWAY

\*

FROM STOCK

USED ON	SCALE 1:2	MATERIAL SEE PRT DWG
UNLESS OTHERWISE SPECIFIED:		FINISH SEE PRT DWG
ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: JX ± .01 - JXXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-ST'D. 8 REMOVE ALL BURRS & SHARP EDGES		DRAWN AMD 11/11/14
		CHECKED
		DESCRIPTION <b>Cut Sheet</b>
		DWG. NO.
		REV.
SIZE: B		